

ENTRYDOORS



EXTERIOR DOOR SYSTEMS | INTERIOR DOOR SYSTEMS | COMMERCIAL | HARDWARE



Table of Contents

2024-2025

	DESIGNER ENTRY DOOR SYSTEMS
4	Spotlite Model 842 - 5 Lite
5	Narrow Lite
6	4 Lite
7	Spotlite Model 840 - 3 Lite
	ENTRY DOOR SYSTEMS
8	Economy
10	Basic
12	Maverick
14	Dakota
16	Titan
18	Workhorse Steel
20	Workhorse Fiberglass
22	EXTERIOR GLASS OPTIONS
	SPECIFICATIONS
24	Pre-Finishing
26	Add-Ons
28	Door Specifications
30	Frame Specifications
32	Checklist for Ordering
34	GARDEN PATIO DOORS



ENTRY^{DOORS}



Built for the Canadian Climate

Madero's Entry Series door systems are tailored to withstand the extreme Canadian climate. A versatile program featuring single exterior door openings used throughout your home and yard. Steel and fiberglass slabs are partnered with wood, composite or aluminum clad frames. Madero doors are built with quality and performance in mind, with options to fit your style and budget.

DESIGNER ENTRY^{SERIES}

Designer Entry Series

Modern designs with the functionality of the Entry Collection. Madero offers a popular line-up of entry doors that provide the utmost street appeal. Our doors are built with quality and performance in mind; perfect for all single openings. For designer options to fit your style and budget - choose Madero.

Black & White Series

This system features a factory Polytex finish: black on the exterior, white on the interior. The frame is clad with black aluminum to the exterior and is complete with slimline aluminum brickmould. Available as inswing only.



NEW FOR 2024

The Madero Entry Series has added a full lite cutout for customers looking for a fast solution to their door renovation.

8 NEW GLASS OPTIONS

Now available in the most popular Full Lite glass options:
Venting, Clear Low-E, Miniblind Low-E and 15 Lite White Internal Low-E.



DESIGNER ENTRY SERIES

SPOTLITE MODEL 842 - 5 LITE

Architectural style is what gives a home its character. The Spotlite Model 842 features five 22" x 3" factory-installed horizontal inserts. Available in Clear or Frosted glass. This image showcases the Black & White series, with owner supplied-custom brickmould.



DESIGNER ENTRY SERIES

NARROW LITE

Trends come and go, good designs last. The Narrow Lite features a 7" x 64" insert installed on either the left or right hand side of your door. Available in factory-installed Clear or Frosted glass. This image showcases black painting inside and out.



DESIGNER ENTRY SERIES

4 LITE

A 4 Lite door system creates a statement both inside and out. This style wins as the designer's choice every time. When choosing Frosted Low E glass, the unit gives complete privacy while still allowing light to filter through. Clear Low E provides maximum viewing to your outdoor space. This photo showcases optional factory painting in Ash.



SPOTLITE MODEL 840 - 3 LITE

A retro look that is even more popular today than it was back then. The Model 840 3 Lite features 12" x 12" factory-installed inserts centered in the door. Available in Clear or Frosted glass. This photo showcases the Black & White series.



ECONOMY^M

Import Warm White Steel Slab
Wood Frame

The Economy entry level unit, designed specifically for garages and outbuildings, combines a primed steel inswing 6 panel door with a wood frame.



STEEL SLAB

SIZES: Width: 2/8, 3/0 - Height: 6/8

STEEL: 6 panel import, 24 gauge primed warm white steel slab with primed wood stiles, wood top rail and composite bottom rail. Polyurethane core with 12" wood lock block.

DRILLING: Available with double drilling only. Complete with mortised face plate for superior hardware installation. Inswing only.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Available with or without 180 Step Brickmould. Must specify at time of ordering.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

5 year limited manufacturer's warranty on door slab.
5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.

DOOR DESIGNS AVAILABLE



6 Panel only





M BASIC

High Definition Steel Slab
Wood Frame

The Basic offers style, function and most importantly, affordability. It features high definition bright white steel combined with a wood frame for an economical and steadfast entry solution.



STEEL SLAB

SIZES: Width: 2/6 (6 panel only), 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE



Flush



6 Panel



Full Lite with cutout



Sunburst



4 Lite



6 Panel with cutout

WARRANTY

5 year limited manufacturer's warranty on door slab.
5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.





MAVERICK

Smooth White Fiberglass Slab
Wood Frame

The Maverick is suitable for residential applications, outbuildings or garage needs. It has the benefits of a maintenance-free fiberglass door slab with a time trusted wood frame.

FIBERGLASS SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE



Flush



6 Panel



Full Lite with
cutout



Sunburst



4 Lite



6 Panel with
cutout

WARRANTY

25 year limited manufacturer's warranty on door slab.
5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.





DAKOTA

High Definition Steel Slab
Composite Frame

The Dakota features a composite maintenance-free frame paired with a high definition, bright white steel slab for long-lasting performance at an affordable price. Strength, beauty and security are consolidated in this popular door system.



STEEL SLAB

SIZES: Width: 2/6, 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

COMPOSITE FRAME

Maintenance free, smooth white composite frame available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE



Flush



6 Panel



Full Lite with cutout



Sunburst



4 Lite



6 Panel with cutout

WARRANTY

5 year limited manufacturer's warranty on door slab.
5 year limited manufacturer's warranty on frame and components - no painting required





TITAN

Smooth White Fiberglass Slab
Composite Frame

As the flagship of Madero's Entry Series, the Titan provides the best in strength and security with a maintenance-free design. Built specifically to withstand the harsh Canadian climate, it features a maintenance-free fiberglass door with a composite frame. No painting required.



FIBERGLASS SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block.

DRILLING: Available in single or double drilled. Complete with mortised face plate for superior hardware installation.

Available in inswing and outswing.

GLASS

Glass inserts can be factory installed in the 6 panel 23"x37" cutout, or the flush 20"x64" / 22"x64" cutout. For designs refer to page 23.

COMPOSITE FRAME

Maintenance free, smooth white composite frame available in 4-9/16" or 6-9/16" jamb depth. Brickmould factory installed.

FRAME CLADDING

Available with white or black aluminum cladding (exterior of jamb only) with optional slimline aluminum brickmould. Not available in outswing units.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

DOOR DESIGNS AVAILABLE



Flush



6 Panel



Full Lite with cutout



Sunburst



4 Lite



6 Panel with cutout

WARRANTY

25 year limited manufacturer's warranty on door slab.
5 year limited manufacturer's warranty on frame and components - no painting required.





STEEL SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

STEEL: 24 gauge primed high definition steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block. Door viewer included.

DRILLING: Inside door can be single or double drilled.

GLASS VENTING INSERT

Outside Door - 22" x 36" Half Vent with dual, clear glass, raises and lowers for increased airflow, and fixed screen.

FRAME

A double rabbeted jamb system accommodates two 1-3/4" door slabs. Choose from kiln dried, finger jointed primed pine or smooth white composite. Available in 4-9/16", 6-9/16" or 8-1/2" jamb depth.

CHECK CHAIN

Frame system includes a check chain to prevent the exterior door from overextending.

ADJUSTABLE STRIKE PLATES

Provides for extra security and allows for on-site adjustments.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

5 year limited manufacturer's warranty on steel slab;
5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase.
Workhorse SteelComp - no painting required.

WORKHORSE COMBO

High Definition Steel Slab
Double Rabbeted Wood Frame


WORKHORSE STEELCOMP

High Definition Steel Slab
Double Rabbeted Composite Frame

DOOR DESIGNS AVAILABLE



HANDING CHART

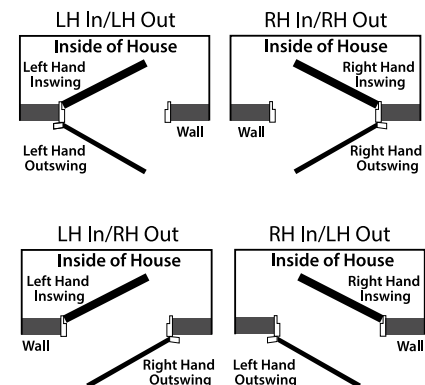



FIBERGLASS SLAB

SIZES: Width: 2/8, 2/10, 3/0 - Height: 6/8

FIBERGLASS: 6 Panel Smooth white pre-pigmented fiberglass, composite stiles and rails, polyurethane core and full length steel reinforced wood lock block. Door viewer included.

DRILLING: Inside door can be single or double drilled.

GLASS VENTING INSERT

Outside Door - 22" x 36" Half Vent with dual, clear glass, raises and lowers for increased airflow, and fixed screen.

FRAME

A double rabbeted jamb system accommodates two 1-3/4" door slabs. Choose from kiln dried, finger jointed primed pine or smooth white composite. Available in 4-9/16", 6-9/16" or 8-1/2" jamb depth.

CHECK CHAIN

Frame system includes a check chain to prevent the exterior door from overextending.

ADJUSTABLE STRIKE PLATES

Provides for extra security and allows for on-site adjustments.

WEATHERSEALS

FIXED SILL: Extruded aluminum in mill finish with composite substrate.

SILL GASKETS: Prevent rain penetration and avoids messy caulking.

DOOR SHOE: Premium white vinyl adjustable shoe.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HINGES

Ball bearing hinges in zinc finish.

WARRANTY

25 year limited manufacturer's warranty on fiberglass slab; 5 year limited manufacturer's warranty on frame and components if painted within 45 days of purchase. Workhorse FiberComp - no painting required.

WORKHORSE COMBOPLUS

Smooth White Fiberglass Slab
Double Rabbeted Wood Frame


WORKHORSE FIBERCOMP

Smooth White Fiberglass Slab
Double Rabbeted Composite Frame

DOOR DESIGNS AVAILABLE



HANDING CHART

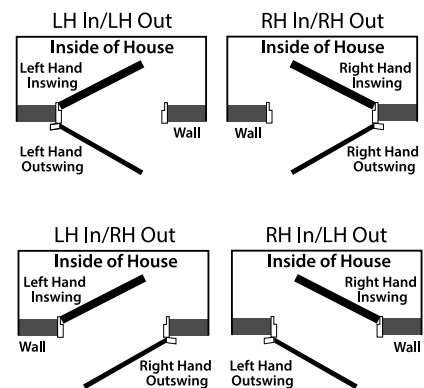

GLASS OPTIONS

ENTRY SERIES



Bistro glass insert - Colony



15 Internal glass insert - Warm White



Mini Blind insert - Warm White



Nouveau glass insert - Black

Choose From Several Glass Options

Madero's door glass inserts provide an easy do-it-yourself project and are a great way to enhance the beauty of your home's entry system.

Door Size	Door Type	Cutout Size	Glass Size
2/8, 2/10, 3/0	6 Panel	23" x 37"	22" x 36"
2/8	Flush	21" x 65"	20" x 64"
2/10, 3/0	Flush	23" x 65"	22" x 64"



CLEAR

PL2337-1E RP
PL2165-1E RP
PL2365-1 LE RP

- Clear glass
- Privacy rating: 1

Glass Size: 22"x36",
20"x64", 22"x64"



INTERNAL GRILLE

PL2337-WIF 5/8 RP
PL2165-WIF-5/8-E RP
PL2365-WIF LE 5/8 RP

- Clear glass with 5/8" internal grille
- Privacy rating: 1

Glass Size: 22"x36",
20"x64", 22"x64"



MINI BLIND

PL2337-MBRL RP
PL2165-MBRL-LE RP
PL2365-MBRL-LE RP

- Clear glass
- Raise, lower & tilt
- Privacy rating: 1

Glass Size: 22"x36",
20"x64", 22"x64"



VENT

MARK-12 VENT RP
MARK-120 RP
MARK-122 RP

- Clear glass with removable screen
- Privacy rating: 1

Glass Size: 22"x36",
20"x64", 22"x64"



BISTRO

BISTRO PAT 2236 RP

- Chinchilla glass, beveled clear glass and diamond glass with patina coming
- Privacy rating: 5

Glass Size: 22"x36"



ALYS

ALYS PVC 2236 RP

- Sandblasted and V-groove glass
- Privacy rating: 9

Glass Size: 22"x36"



CELESTE

CELESTE PVC 2236 RP

- Beveled clear glass, small hammered glass, aqualite glass with patina coming.
- Privacy rating: 5

Glass Size: 22"x36"




NOUVEAU

NOUVEAU 684-78R4 RP

- Clear cluster, bevel and glue chip glass with nickel coming
- Privacy rating: 6

Glass Size: 22"x36"

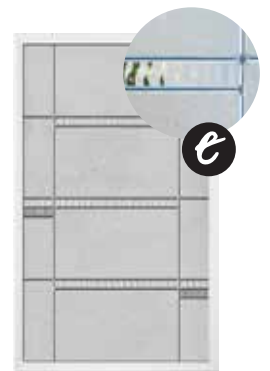

CROSSWALK

CROSSWALK 684-CWK RP

- Micro-iced granite with gray and clear softwave glass and nickel coming
- Privacy rating: 8

Glass Size: 22"x36"

Madero's Door Glass Features:

- Door glass designs use handcrafted glass in a variety of textures to create dimension, depth, contrast, and privacy while allowing natural light to enter the home.
- Madero's decorative glass is sealed between two panels of tempered safety glass and insulated for air and water-tight performance.
- 10 year glass seal warranty.
- Low E coating with Argon gas.



20"x64", 22"x64"

PRIVACY RATING



1 - Transparent
Objects can be seen clearly through the glass from the other side.

5 - Diffused
Objects are diffused, but still detectable through the glass from the other side.

10 - Private
Only light will travel through the glass from the other side.

22"x36"

PRE-FINISHING OPTIONS

ENTRY SERIES



Crosswalk glass insert- Melon




Alys glass insert- Stone



4 Lite, clear glass - Smokey Teal



6 Panel - Caliente



Warm White
PMS P 1-1 U



Charcoal
PMS P179-13 U




Colony
PMS 7544C



Smokey Teal
PMS 5493 C




Cadet Navy
PMS 655C



Ash
PMS P178-1C



Stone
PMS 9C



Black




Buttercup
PMS 134C




Melon
PMS P159-13C

Printed swatch colours may vary slightly from actual product. If you are concerned about exact colour match, we recommend you first request a product sample for accuracy.

Option to paint one side is available. Specify at time of ordering. Split finish option also available.



Caliente
PMS 1815 C



Espresso
PMS 412C



Tangerine
PMS 153C

Pre-Finishing Options


Madero has identified and selected some of the most popular paint and stain colours. Streamline the colour matching process for your project by selecting from Madero's popular colour choices. Doors left manufacture white will have varying shades of white due to the natural products used. Contact your supplier for more details.

ADD-ONS & OPTIONS

ENTRY SERIES

Customize Your Door

Madero's Entry Series door systems have been developed to meet the needs of both residential and commercial environments. Ordered from factory, the add-ons shown below further enhance the door systems for use in your home, garage, shed, or outbuilding.



Self-Closing Hinges

These hinges are placed in the bottom and middle hinge pockets to pull the door shut after it has been opened and released. Tension is to be adjusted on site.




Door Viewer

Allows sight through the door. Cannot be used with any half lite glass options.




GW124 Shoe

Shoes are attached to the bottom of your door to provide draft protection. The PVC and mohair fins provide an air tight seal between the sill and the door.




PP3322 Brickmould

Primed double bead finger joint pine brickmould can replace 180 step brickmould. Specify at time of ordering.

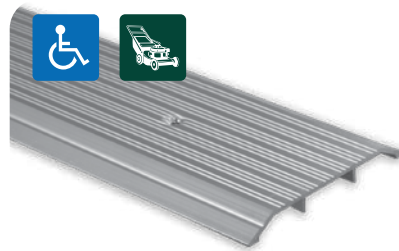

Commercial Sill

Low profile access provides an uninterrupted entry line, allowing ease of mobility for lawnmowers, dollies, etc. Standard sweep not recommended. Net Frame height: 80-1/8" Ideal for sheds, garages & outbuildings.



Commercial Sweep

Designed for use in conjunction with the commercial sill.



Energy Star and/or NAFS Compliant

NAFS Sill, with an articulating cap is required in construction requiring a building permit in most Canadian jurisdictions. ENERGY STAR products are independently certified to save energy without sacrificing features or functionality.

Inswing Net Frame height: 81-11/16"
Outswing Net Frame height: 81"



ADaptive Sill System


Low profile access provides for ease of mobility for wheelchairs. See Page 27 for more details.

Net Frame height: 80-3/4"



ADaptive Sill System

Low profile access provides for ease of mobility for wheelchairs. The thermal break in the sill deters frost buildup. An innovative jamb boot supports a weather-tight seal and secure corner assembly. Full length caulking strip eliminates water penetration.

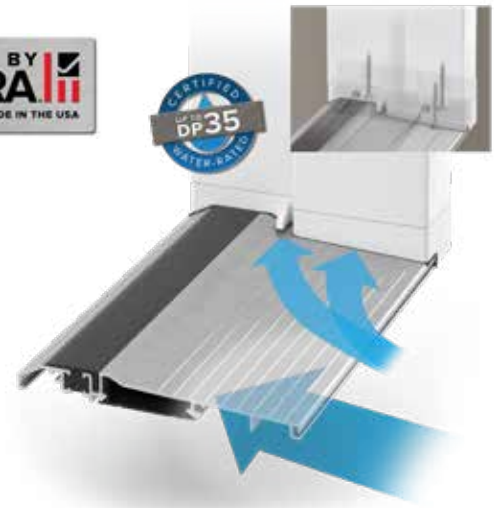

DOOR SPECIFICATIONS

ENTRY SERIES


Steel Doors

Steel doors have been the choice for residential usage for over 50 years. The variety of new panelled designs have maintained the popularity of the steel door.

5 YEAR
Limited
Manufacturer's
Warranty

Novatech®

Madero Import

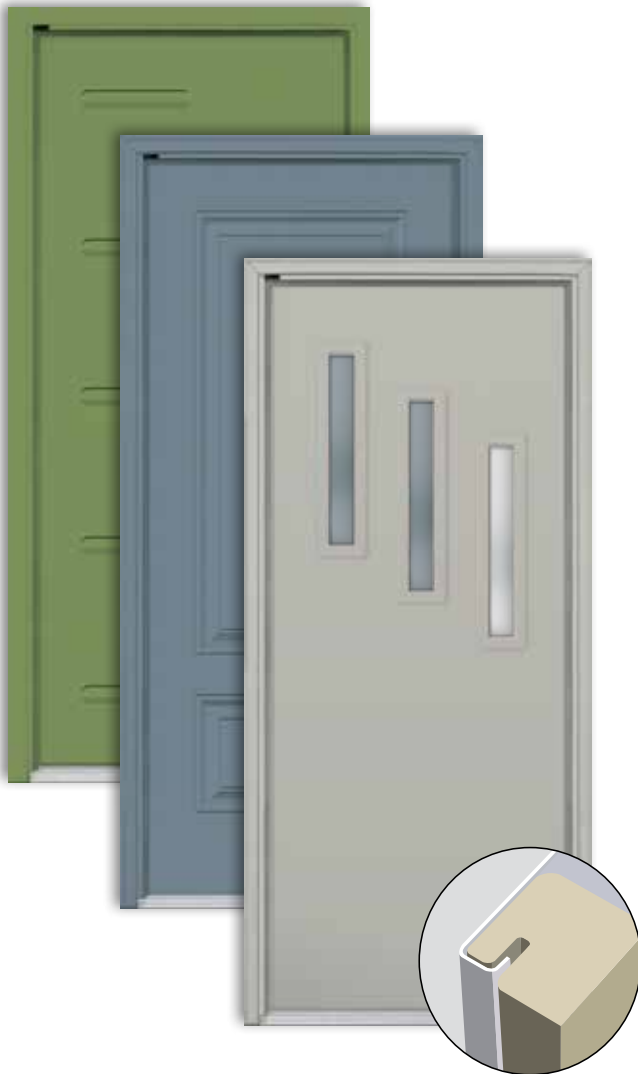

Finish with Ease

Economy units use a Madero import 24 gauge steel slab with a primed warm white finish. Basic and Dakota systems use a N300 primed white finish. Madero systems require no additional paint to achieve a 5 year limited warranty. Doors can easily be painted to match the style of your home - consider factory pre-finishing for your door and frame.



Durability

24 gauge door skins interlock with the stile, providing additional support to reduce delamination and stretching. Steel door skins will not crack or warp, unlike wood.

Strength

A 12" wood lock block provides additional strength and structure to support most residential hardware.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing a superior energy rating over a standard styrene core product.

Cost

Steel entry doors are more affordable compared to wood or fiberglass.

ECONOMY

Import Warm White Steel Slab
Wood Frame

BASIC

High Definition Steel Slab
Wood Frame

DAKOTA

High Definition Steel Slab
Composite Frame

WORKHORSE COMBO

High Definition Steel Slab
Double Rabbeted Wood Frame



Fiberglass Doors

Built for the Canadian Climate

In 2005, Madero partnered with NanYa Plastics, a world leader in the manufacturing of fiberglass, working with Canadian R & D Corp. to develop a maintenance free door and frame system, which meets the climate conditions found within the Canadian market.

25 YEAR
Limited
Manufacturer's
Warranty



Finish with Ease

Smooth white fiberglass doors are supplied in their natural pre-pigmented warm white finish. Though painting is not required to achieve a full 25 year limited warranty, doors can easily be painted to the color of your choosing.



To achieve a realistic, rich appearance. Refer to page 25 for factory finish information.

Durability & Performance

Fiberglass skins are resistant to dents, dings, splintering and corrosion. The rigid structure of our fiberglass doors prevent bowing and warping in extreme temperatures.

Exceptional Security

The full length steel reinforced wood lock block offers a high level of security, while allowing a range of hardware mounting options.

Completely Waterproof

Waterproof composite stiles and rails are sealed and finished to protect all edges of the door from moisture penetration, which can harm the inner insulation and cause rotting.

Energy Efficiency

Filled with an insulating core of 100% CFC free polyurethane foam, providing an excellent R rating, while bonding the two door skins together for additional strength



WORKHORSE COMBOPLUS

Smooth White Fiberglass Slab
Double Rabbeted Wood Frame

TITAN

Smooth White Fiberglass Slab
Composite Frame

MAVERICK

Smooth White Fiberglass Slab
Wood Frame

DOOR FRAMES

ENTRY SERIES

Simple Solutions® Corner Pad Weatherstripping

Small in size but big in impact. The Simple Solution Corner Pad seals out air and moisture.

Compression weatherstrip seals tight when the door is closed and expands when opened, providing a long-lasting weather-tight solution.



Ball Bearing Hinges

All Madero Entry Series door systems ship complete with 4" x 4" ball bearing hinges. Madero's standard hinge finish is C-2G zinc plated.



Metal Cladding Options

Entry Series available with white or black aluminum cladding (exterior of jamb only). Brickmould options include slimline aluminum brickmould or aluminum clad #3322 double bead wood brickmould.



Black



White

Cladding not available on outswing.

Snaplock Nailing Fin

(Dakota, Titan, Workhorse SteelComp, Workhorse FiberComp only.)

Incorporating a hinge-style design, Madero's SnapLock nailing fin snaps into place for new home construction or can be scored and trimmed if not required.



Wood Frame

Kiln dried, primed finger-joint pine—double primed for quality performance and ease of painting. Wood frame requires paint on all exposed surfaces within 45 days of purchase.



Composite Frame

Pre-pigmented smooth white frame components are a blend of PVC and wood fiber composite substrate. Composite will not discolour, absorb moisture, splinter, or rot. Smooth white composite does not require paint.



What to Know Before You Order

Entry Series doors are available in standard widths and 6'8" door slab heights, with single or double drilling to accommodate levers, knobs, handlesets, and deadbolt hardware. Door handles and deadbolt hardware are sold separately.

Product Comparisons

Entry Series door systems are available in a variety of door slab and frame choices.

	Steel Slab	Fiberglass Slab	Basic Wood Frame	Basic Composite Frame
<i>Economy</i> [†]	●		●	
<i>Basic</i>	●		●	
<i>Maverick</i>		●	●	
<i>Dakota</i>	●			●
<i>Titan</i>		●		●
<i>Workhorse Combo</i>	●		●	
<i>Workhorse SteelComp</i>	●			●
<i>Workhorse ComboPlus</i>		●	●	
<i>Workhorse FiberComp</i>		●		●

[†]Economy door systems are available in a 6 panel inswing design only.

Product Measurements

For 6/8 height

All Entry Series doors are available in 2" x 4" (4-9/16") or 2" x 6" (6-9/16") construction, left hand or right hand application and inswing or outswing. Economy door systems are available as inswing applications only.

Entry Series Single Door	Net Frame	
	Inswing	Outswing
2/6	31-1/2" x 81-5/8"	31-1/2" x 81"
2/8	33-1/2" x 81-5/8"	33-1/2" x 81"
2/10	35-1/2" x 81-5/8"	35-1/2" x 81"
3/0	37-1/2" x 81-5/8"	37-1/2" x 81"

Rough Opening Measurements (RO)

Add 1" to width of net frame

Add 1/2" to height of net frame

Outside Measurements of Brickmould (OSM)

Inswing: Add 2-1/2" to width of net frame
Add 1-1/4" to height of net frame

Outswing: Add 3" to width of net frame
Add 1-1/2" to height of net frame

Outside Measurements of Slimline Aluminum (OSM)

Inswing: Add 15/16" to width of net frame
Add 1/2" to height of net frame

Outswing: Not Available

Note: Above measurements comply with the Endura fixed sill system.





ORDERING CHECKLIST | DESIGNER ENTRY SERIES

STEP 1 Product

Steel or fiberglass door, paired with wood or composite frame.

- BASIC MAVERICK DAKOTA TITAN

- White Black (Exterior) & White (Interior) Series (Basic, Dakota only)

STEP 2 Style

- Narrow Lite Clear (Right) Narrow Lite Clear (Left) Narrow Lite Frosted (Right) Narrow Lite Frosted (Left)
 4 Lite Clear 4 Lite Frosted 5 Lite Clear 5 Lite Frosted One Lite Clear One Lite Frosted

STEP 3 Door Specifications

- Width:** 2/8 (32") 3/0 (36") | **Height:** 6/8 (80")

Machining:

- SD (Single Drill) DD (Double Drill)

Jamb:


- 4-9/16" 6-9/16" | Primed Wood Smooth White Composite White Clad Jamb Black Clad Jamb

Brickmould: Note: If brickmould is not required, do not check off a box.

- Wood 180 Step Smooth White Composite Slimline White Aluminum Slimline Black Aluminum
 Wood 3322 Double Bead Shipped Loose


STEP 4 Configuration Options

As viewed from outside

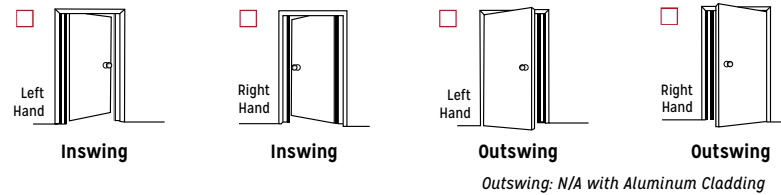

STEP 5 Prefinishing Options

Choose your finish.

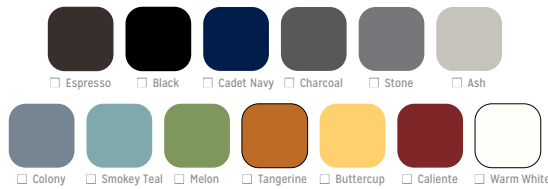

- Paint Unit - **Both Sides**
 Paint Unit - **Exterior Side Only**
 Paint Unit - **2 Colours** (Please specify below)

- Paint Slab Only - **Both Sides**
 Paint Slab Only - **Exterior Side Only**

*If you do not choose a colour on one side of the door unit, it will remain in its natural white or primed product colors.

Customer Signature: _____ Date: _____

Store Name of #: _____ Tag: _____ PO: _____

While Madero makes every effort to ensure the information contained in our brochures is accurate, we do not accept liability for any inaccuracies. Our brochures are subject to change, as well as errors and omissions, without notice or liability. Doors are provided unfinished/unstained and without hardware unless otherwise noted. All photos are for illustration purposes only and depicted doors and frames may not represent Madero products.



STEP 1 Steel or fiberglass door, paired with wood or composite frame.

Product

- ECONOMY BASIC MAVERICK DAKOTA TITAN WHPC WHPLUSC

STEP 2 Economy available in 6 Panel only

Style

- Clear Flush 9 Internal Mini Blind Vent Nouveau Crosswalk Bistro Alys Celeste 6 Panel Sunburst 4 Lite Cutout to 23" x 37" Cutout to 20" x 64" Cutout to 22" x 64"

STEP 3 Economy available in 2/8 and 3/0 only

Door Specifications

- Width: 2/8 (32") 2/10 (34") 3/0 (36") | Height: 6/8 (80")

Machining:

- SD (Single Drill - not available in Economy) DD (Double Drill)

Jamb:

- 4-9/16" 6-9/16" | Primed Wood Smooth White Composite White Clad Jamb Black Clad Jamb


Brickmould: Note: If brickmould is not required, do not check off a box.

- Wood 180 Step Smooth White Composite Slimline White Aluminum Slimline Black Aluminum Wood 3322 Double Bead Shipped Loose

STEP 4 Configuration Options


Choose your door system configuration:

(As viewed from outside)



Economy available in inswing only Outswing: N/A with Aluminum Cladding

Workhorse Combo/Plus door system configuration:

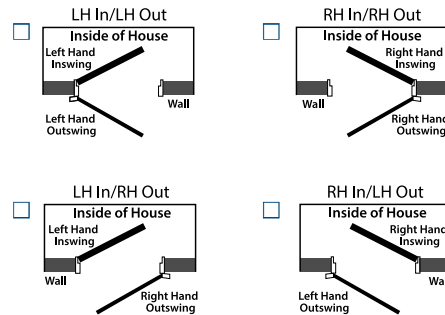

STEP 5 Prefinishing Options

Choose your finish.



- Paint Unit - Both Sides Paint Unit - Exterior Side Only Paint Unit - 2 Colours (Please specify below) Paint Slab Only - Both Sides Paint Slab Only - Exterior Side Only

*If you do not choose a colour on one side of the door unit, it will remain in its natural white or primed product colors.

STEP 6 Add-Ons

- Commercial Sill Commercial Sweep GW124 Shoe Self-Closing Hinges Door Viewer NAFS Sill ADaptive Sill System

Customer Signature: _____ Date: _____

Store Name of #: _____ Tag: _____ PO: _____



Garden Patio Doors

Madero Entry Series Garden Patio Doors offers 3 select choices for your new construction or renovation project. All types are offered in a variety of sizes to fit your project. For a more extensive offering, please refer to the Madero Artisan Catalogue or view on madero.ca

BASIC GARDEN PATIO DOORS

Venting Garden Doors have the active door as a typical outswing and the venting door opening with awning hardware, allowing for maximum air circulation. The screen is to the interior of the home.

Reno garden doors in 5/0 and 6/0 are the ideal solution for replacing outdated sliding patio doors.

For renovation or new construction, garden doors are also available in 67" or 75" x 81" net frame.

STEEL SLAB

Flush 24 Gauge primed high definition N300 steel, bright white, with primed wood stiles and rails. Polyurethane core with 12" wood lock block.

WOOD FRAME

Kiln dried, finger jointed primed pine available in 4-9/16" or 6-9/16" jamb depth. 180 Step Brickmould is factory installed.

WEATHERSEALS: NAFS COMPLIANT

ZAC SILL: Extruded aluminum in mill finish, thermal break, composite bottom and articulating cap.

SILL GASKETS: Prevents rain penetration and avoids messy caulking.

DOOR BOTTOM: The kerf design provides a superior seal against water, air and dirt.

CORNER PAD: Simple solution corner pad helps eliminate air and water leaks.

WEATHERSTRIPPING: Black

HARDWARE:

Complete with removable screen, white awning hardware and two white sash locks.

Garden Renovator*

Net Frame Width

2/8	67" X 81"
3/0	75" X 81"
5/0	59" X 79-1/4"
6/0	71" X 79-1/4"

*Steel door only



Garden Venting



Clear Low-E

A perfect choice for the unobstructed view of your outdoor spaces.




Enclosed Mini Blinds

Blinds lower neatly within full privacy channels to eliminate light gaps. Low-E coating.



White Grille Glass

Between the glass internal 5/8" grilles provide the beauty of a true divided light with ease of cleaning. Low-E glass.

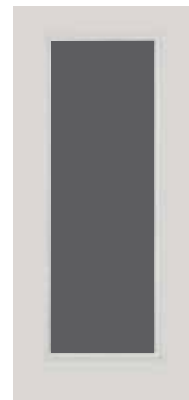

Open Door Units

Glass sold separately.



Artisan Doors



Garden Patio Doors



Larson Product Catalogue



Interior Doors





Multi-Family



Commercial

Contact us at:
madero.ca | canada.orders@madero.ca | 1.800.667.6977

  @maderocanada

Designed & printed by:
 **TWO SIX**
CREATIVE